


Description

Soundis XPS *Integral* is a CNC routed, extruded polystyrene panel available with the option of 100-micron aluminium foil facing.


Manufactured to close dimensional tolerances, giving high compressive strength and with a highly conductive aluminium facing for heat transfer, these underfloor heating panels offer the highest level of performance in every way.

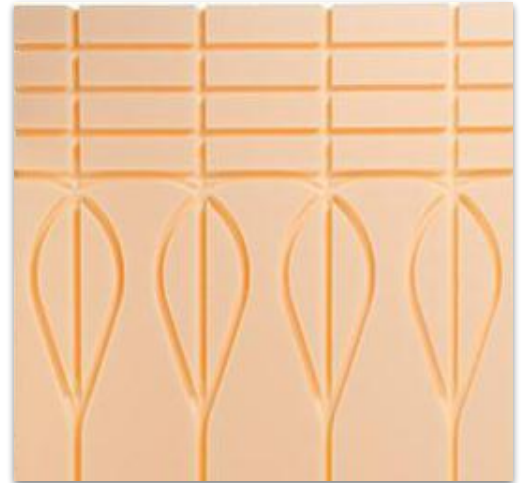

Technical Properties

| | |
|------------------------|--|
| Widths Available | 1200mm / 600mm / 300mm |
| Lengths Available | 1200mm / 2400mm |
| Thicknesses Available | 18mm, 20mm, 25mm, 30mm, 35mm, 40mm, 50mm |
| Dimensional Tolerances | (+/- 1mm) |
| Compressive Strength | 200KPa / 300kPa |
| Moisture Absorption | 0.6% |
| Widths Available | 1200mm / 600mm / 300mm |


Key Benefits




Pre-Grooved For All Types Of 12-16mm UFH Pipe



Option of 100 Micron Aluminium Foil Facing



High Compressive Strength



Thermal Conductivity 0.033 - 0.036 W/mK