

Description


Soundis Dry Screed integral is a low profile, CNC machined, reinforced gypsum fibre panel. These dry fit screed replacement panels reduce floor height and save on drying times.

The Soundis Dry Screed Integral system is a highly conductive UFH panel that gives excellent dimensional stability and heat transfer outputs, and can have floor finishes applied within 24hrs of installation.



Technical Properties	
Panel Dimensions	600mm (W) x 1200mm (L) x 18mm (H)
Panel m ²	0.72 m ² Per Panel
Panel Per Pallet	80 Panels (57.6 m ²)
Thermal Conductivity	0.032 W/mK
Panel Density	1200kg/m ³
Panel Dimensions	600mm (W) x 1200mm (L) x 18mm (H)

Key Benefits	
	Can Be Laid Directly Without Decoupling Mat
	High Point Load & UDL Performance
	Non-Combustible (A2)
	High Density (1200 kg/m³)

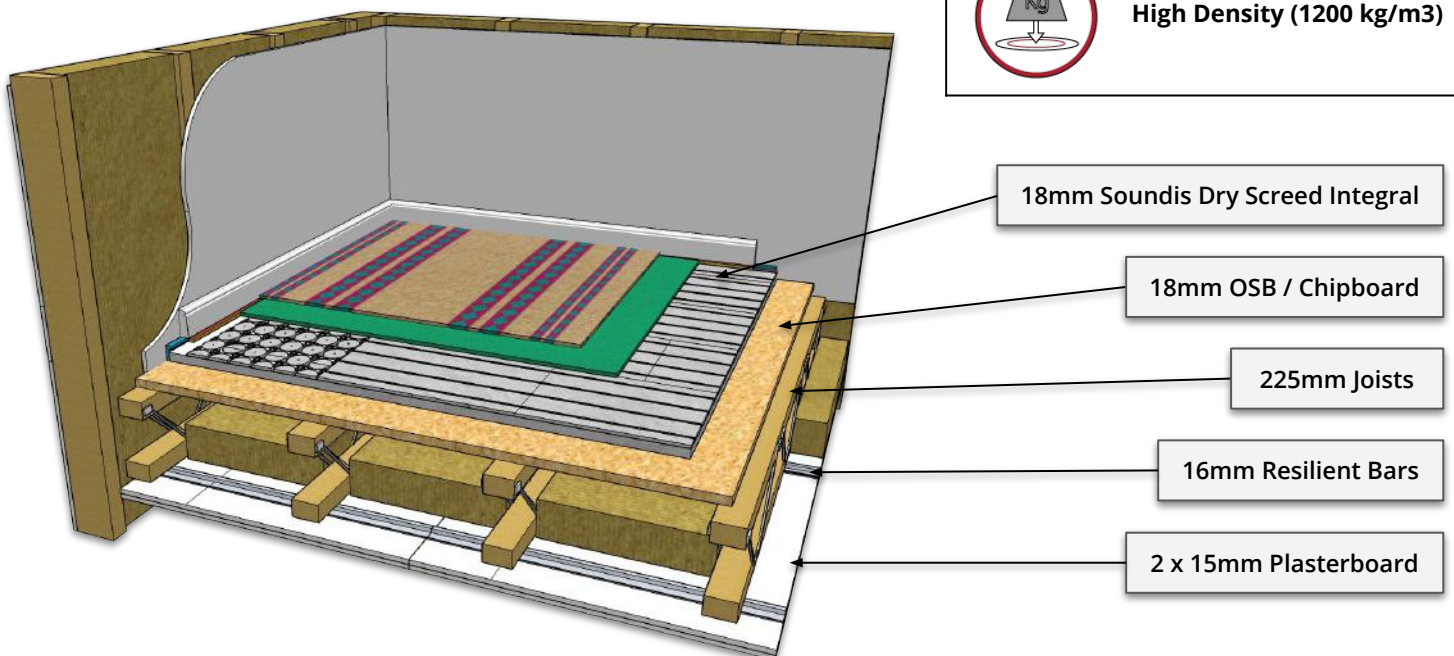

Datasheet No. V2.2-092019